


Chapter 1


Introduction: Some Representative Problems



Slides by Kevin Wayne. Copyright © 2005 Pearson-Addison Wesley. All rights reserved.

1.1 A First Problem: Stable Matching

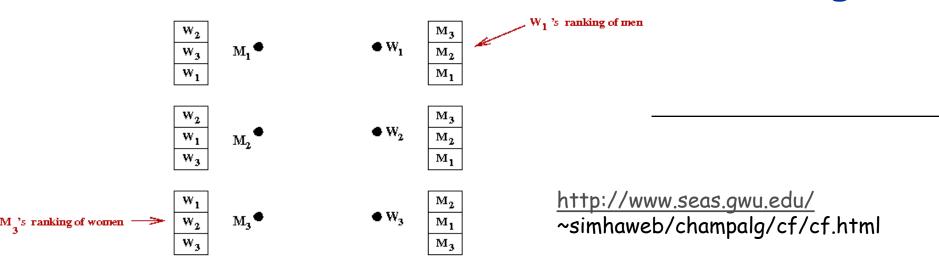


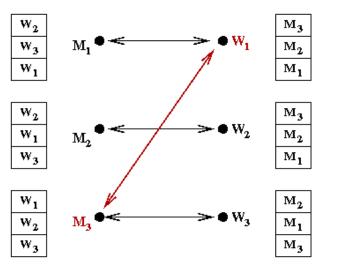


Both M₃ and W₁ prefer each other to their current spouses They will elope

A Prize Winning Algorithm

- Lloyd Shapley, Nobel Prize Winner 2012 in economics
- Obtained the prize for a number of contributions, one being the Gale-Shapley algorithm for stable matching.

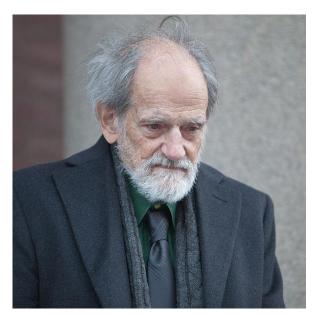

Lloyd Shapley

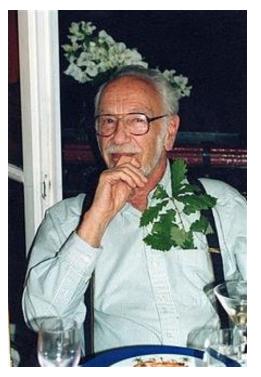

David Gale: 1921-2008

D. Gale and L. S. Shapley: "College Admissions and the Stability of Marriage", American Mathematical Monthly 69, 9-14, 1962.

Pictures: http://en.wikipedia.org/wiki/Lloyd_Shapley http://en.wikipedia.org/wiki/David_Gale Matching Residents to Hospitals

Goal. Given a set of preferences among hospitals and medical school students, design a self-reinforcing admissions process.

Unstable pair: applicant x and hospital y are unstable if:


- x prefers y to its assigned hospital.
- y prefers x to one of its admitted students.

Stable assignment. Assignment with no unstable pairs.

- Natural and desirable condition.
- Individual self-interest will prevent any applicant/hospital deal from being made.

Goal. Given n men and n women, find a "suitable" matching.

- Participants rate members of opposite sex.
- Each man lists women in order of preference from best to worst.
- Each woman lists men in order of preference from best to worst.

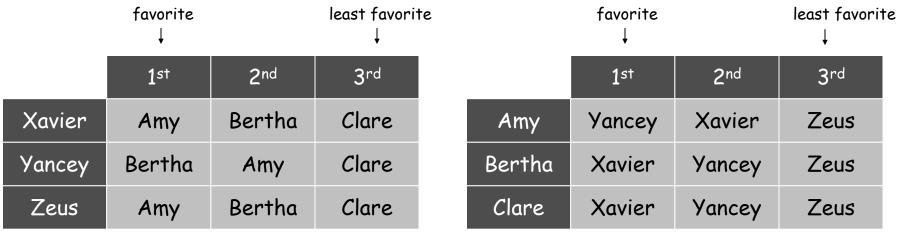

Men's Preference Profile

Perfect matching: everyone is matched monogamously.

- Each man gets exactly one woman.
- Each woman gets exactly one man.

Stability: no incentive for some pair of participants to undermine assignment by joint action.

- In matching M, an unmatched pair m-w is unstable if man m and woman w prefer each other to current partners.
- Unstable pair m-w could each improve by eloping.

Stable matching: perfect matching with no unstable pairs.


Stable matching problem. Given the preference lists of n men and n women, find a stable matching if one exists.

Q. Is assignment X-C, Y-B, Z-A stable?




Men's Preference Profile

- Q. Is assignment X-C, Y-B, Z-A stable?
- A. No. Bertha and Xavier will hook up.

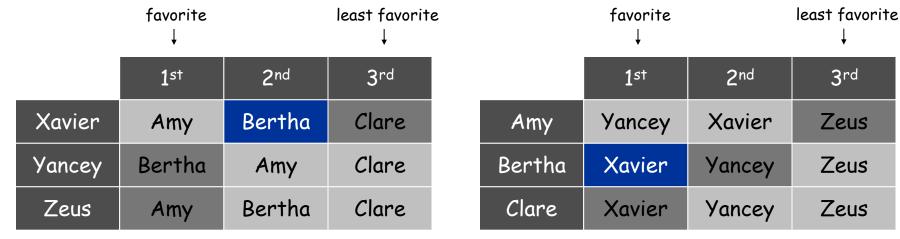

Men's Preference Profile

Q. Is assignment X-A, Y-B, Z-C stable? A. Yes.

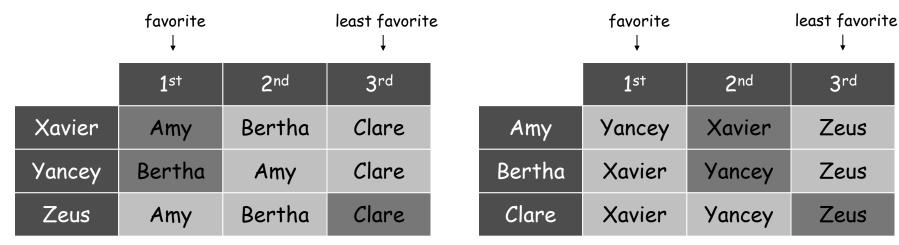

Men's Preference Profile

Stable Roommate Problem

- Q. Do stable matchings always exist?
- A. Not obvious a priori.

is core of market nonempty?

Stable roommate problem.

- 2n people; each person ranks others from 1 to 2n-1.
- . Assign roommate pairs so that no unstable pairs.

	1 st	2 nd	3 rd
Adam	В	С	D
Bob	С	А	D
Chris	А	В	D
Doofus	А	В	С

Observation. Stable matchings do not always exist for stable roommate problem.

Propose-And-Reject Algorithm

Propose-and-reject algorithm. [Gale-Shapley 1962] Intuitive method that guarantees to find a stable matching.

```
Initialize each person to be free.
while (some man is free and hasn't proposed to every woman) {
   Choose such a man m
   w = 1<sup>st</sup> woman on m's list to whom m has not yet proposed
   if (w is free)
        assign m and w to be engaged
   else if (w prefers m to her fiancé m')
        assign m and w to be engaged, and m' to be free
   else
        w rejects m
}
```

Proof of Correctness: Perfection

Claim. All men and women get matched.

- Pf. (by contradiction)
 - Suppose, for sake of contradiction, that Zeus is not matched upon termination of algorithm.
 - Then some woman, say Amy, is not matched upon termination.
 - By Observation 2, Amy was never proposed to.
 - But, Zeus proposes to everyone, since he ends up unmatched.

Proof of Correctness: Termination

Observation 1. Men propose to women in decreasing order of preference.

Observation 2. Once a woman is matched, she never becomes unmatched; she only "trades up."

Claim. Algorithm terminates after at most n² iterations of while loop. Pf. Each time through the while loop a man proposes to a new woman. There are only n² possible proposals.

	1st	2 nd	3 rd	4 th	5 th		1 ^{s†}	2 nd	3 rd	4 th	5 th
Victor	A	В	С	D	E	Amy	W	Х	У	Z	V
Wyatt	В	С	D	A	E	Bertha	X	У	Z	V	W
Xavier	С	D	А	В	E	Clare	У	Z	V	W	Х
Yancey	D	А	В	С	E	Diane	Z	V	W	Х	У
Zeus	A	В	С	D	E	Erika	V	W	Х	У	Z

n(n-1) + 1 proposals required

Proof of Correctness: Stability

Claim. No unstable pairs.

- Pf. (by contradiction)
- Suppose A-Z is an unstable pair: each prefers each other to partner in Gale-Shapley matching S*.
- Case 1: Z never proposed to A.
 ⇒ Z prefers his GS partner to A.
 ⇒ A-Z is stable.
- Case 2: Z proposed to A.
 - \Rightarrow A rejected Z (right away or later)
 - ⇒ A prefers her GS partner to Z. ← women only trade up
 - \Rightarrow A-Z is stable.
- In either case A-Z is stable, a contradiction.

5*

Amy-Yancey

Bertha-Zeus

. . .

Summary

Stable matching problem. Given n men and n women, and their preferences, find a stable matching if one exists.

Gale-Shapley algorithm. Guarantees to find a stable matching for any problem instance.

- Q. How to implement GS algorithm efficiently?
- Q. If there are multiple stable matchings, which one does GS find?

Efficient Implementation

Efficient implementation. We describe $O(n^2)$ time implementation.

Representing men and women.

- Assume men are named 1, ..., n.
- Assume women are named 1', ..., n'.

Engagements.

- Maintain a list of free men, e.g., in a queue.
- Maintain two arrays wife[m], and husband[w].
 - set entry to ${\scriptstyle 0}$ if unmatched
 - if m matched to w then wife[m]=w and husband[w]=m

Men proposing.

- For each man, maintain a list of women, ordered by preference.
- Maintain an array count [m] that counts the number of proposals made by man m.

Efficient Implementation

Women rejecting/accepting.

- . Does woman w prefer man m to man m'?
- For each woman, create inverse of preference list of men.
- Constant time access for each query after O(n) preprocessing.

Amy	1 st	2 nd	3 rd	4 th	5 th	6 th	7 th	8 th
Pref	8	3	7	1	4	5	6	2
Amy	1	2	3	4	5	6	7	8
Inverse	4 th	8 th	2 nd	5 th	6 th	7 th	3 rd	1 ^{s†}

Amy prefers man 3 to 6 since inverse[3] < inverse[6]

2 7

Understanding the Solution

Q. For a given problem instance, there may be several stable matchings. Do all executions of Gale-Shapley yield the same stable matching? If so, which one?

An instance with two stable matchings.

- A-X, B-Y, C-Z.
- A-Y, B-X, C-Z.

	1 st	2 nd	3 rd
Xavier	А	В	С
Yancey	В	А	С
Zeus	А	В	С

	1 st	2 nd	3 rd
Amy	У	Х	Z
Bertha	Х	У	Z
Clare	Х	У	Z

Understanding the Solution

Q. For a given problem instance, there may be several stable matchings. Do all executions of Gale-Shapley yield the same stable matching? If so, which one?

Def. Man m is a valid partner of woman w if there exists some stable matching in which they are matched.

Man-optimal assignment. Each man receives best valid partner.

Claim. All executions of GS yield man-optimal assignment, which is a stable matching!

- No reason a priori to believe that man-optimal assignment is perfect, let alone stable.
- Simultaneously best for each and every man.


Man Optimality

Claim. GS matching S* is man-optimal.

- Pf. (by contradiction)
 - Suppose some man is paired with someone other than best partner.
 Men propose in decreasing order of preference ⇒ some man is rejected by valid partner.
 - Let Y be first such man, and let A be first valid woman that rejects him.
 - Let S be a stable matching where A and Y are matched.
 - When Y is rejected, A forms (or reaffirms) engagement with a man, say Z, whom she prefers to Y.
 - Let B be Z's partner in S.
 - Z not rejected by any valid partner at the point when Y is rejected by A. Thus, Z prefers A to B.
 - But A prefers Z to Y.
 - Thus A-Z is unstable in S.

since this is first rejection by a valid partner

Stable Matching Summary

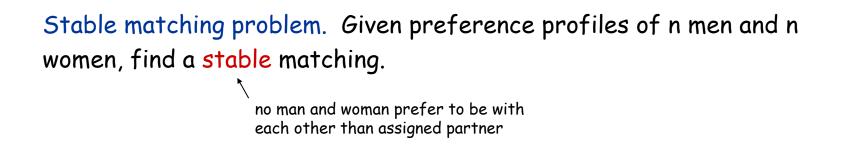

Gale-Shapley algorithm. Finds a stable matching in $O(n^2)$ time.

Man-optimality. In version of GS where men propose, each man receives best valid partner.

w is a valid partner of m if there exist some stable matching where m and w are paired

Q. Does man-optimality come at the expense of the women?

Woman Pessimality

Woman-pessimal assignment. Each woman receives worst valid partner.

Claim. GS finds woman-pessimal stable matching S*.

Pf.

- Suppose A-Z matched in S*, but Z is not worst valid partner for A.
- There exists stable matching S in which A is paired with a man, say Y, whom she likes less than Z.
- Let B be Z's partner in S.
- Z prefers A to B. ← man-optimality
- Thus, A-Z is an unstable in S. •

S

Amy-Yancey Bertha-Zeus Extensions: Matching Residents to Hospitals

Ex: Men \approx hospitals, Women \approx med school residents.

Variant 1. Some participants declare others as unacceptable.

Variant 2. Unequal number of men and women.

resident A unwilling to work in Cleveland

Variant 3. Limited polygamy.

hospital X wants to hire 3 residents

Def. Matching S unstable if there is a hospital h and resident r such that:

- . h and r are acceptable to each other; and
- either r is unmatched, or r prefers h to her assigned hospital; and
- either h does not have all its places filled, or h prefers r to at least one of its assigned residents.

Application: Matching Residents to Hospitals

NRMP. (National Resident Matching Program)

- Original use just after WWII. ← predates computer usage
- Ides of March, 23,000+ residents.

Rural hospital dilemma.

- Certain hospitals (mainly in rural areas) were unpopular and declared unacceptable by many residents.
- Rural hospitals were under-subscribed in NRMP matching.
- How can we find stable matching that benefits "rural hospitals"?

Rural Hospital Theorem. Rural hospitals get exactly same residents in every stable matching!

Lessons Learned

Powerful ideas learned in course.


- Isolate underlying structure of problem.
- Create useful and efficient algorithms.

Potentially deep social ramifications. [legal disclaimer]

Extra Slides

Goal: Given n men and n women, find a "suitable" matching.


- Participants rate members of opposite sex.
- Each man lists women in order of preference from best to worst.
- Each woman lists men in order of preference from best to worst.

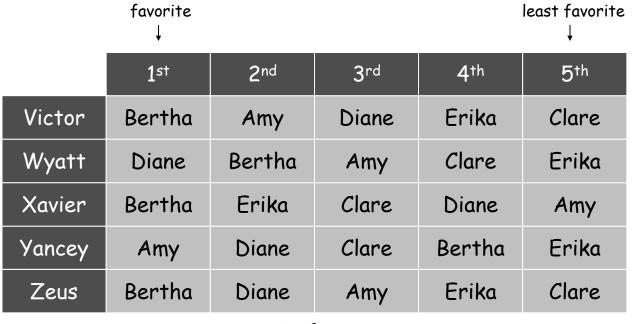

Men's Preference List

Goal: Given n men and n women, find a "suitable" matching.

- Participants rate members of opposite sex.
- Each man lists women in order of preference from best to worst.
- Each woman lists men in order of preference from best to worst.

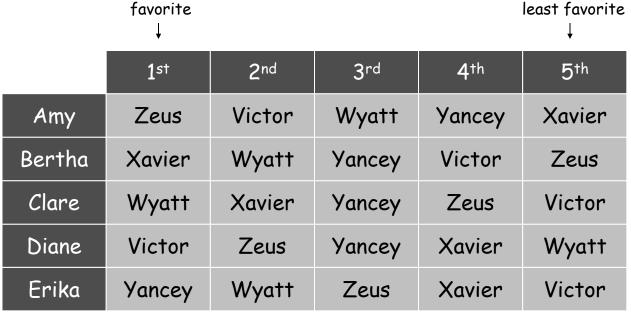

Women's Preference List

Understanding the Solution

Claim. The man-optimal stable matching is weakly Pareto optimal.

No other perfect matching (stable or unstable) where every man does strictly better

Pf.

- Let A be last woman in some execution of GS algorithm to receive a proposal.
- No man is rejected by A since algorithm terminates when last woman receives first proposal.
- No man matched to A will be strictly better off than in man-optimal stable matching.

Deceit: Machiavelli Meets Gale-Shapley

- Q. Can there be an incentive to misrepresent your preference profile?
 - Assume you know men's propose-and-reject algorithm will be run.
 - Assume that you know the preference profiles of all other participants.

Fact. No, for any man yes, for some women. No mechanism can guarantee a stable matching and be cheatproof.

	1 ^{s†}	2 nd	3 rd
Xavier	А	В	С
Yancey	В	А	С
Zeus	А	В	С

Men's Preference List

	1 st	2 nd	3 rd
Amy	У	Х	Ζ
Bertha	Х	У	Z
Clare	Х	У	Z

Women's True Preference Profile

	1 ^{s†}	2 nd	3 rd
Amy	У	Z	Х
Bertha	Х	У	Z
Clare	Х	У	Ζ

Amy Lies

Lessons Learned

Powerful ideas learned in course.

- Isolate underlying structure of problem.
- Create useful and efficient algorithms.

Potentially deep social ramifications. [legal disclaimer]

- Historically, men propose to women. Why not vice versa?
- Men: propose early and often.
- Men: be more honest.
- Theory can be socially enriching and fun!
- CS majors get the best partners!